

## FRAMECAD Fibre Cement Tiles

Using Fibre Cement as the base material, the tiles are formed, cured, and then painted to produce a high quality roofing tile

### Applications

- Residential Villas and Houses

### Features & Benefits

- Manufactured in a computer controlled facility, FRAMECAD Roof tiles are high quality with consistent size, shape, and excellent surface finish
- Durable reinforced fibre cement substrate provides excellent durability and impact resistance
- Suitable for all climates, giving insulation from extreme heat, cold, and noise
- Available prefinished in 6 standard colours, reducing construction time.
- High quality paint finish minimises ongoing maintenance, and delivers excellent service life of up to 30 years
- Full range of accessories available for most roof types



### Manufacturing Classification:

- Manufactured under ISO9001 certified Quality Management System
- Manufactured under ISO14001 certified Environmental Management System



SPECIFICATIONS		
FRAMECAD Fibre Cement Tiles	Tile Size	750mm x 496mm (0.372 m <sup>2</sup> )
	Effective Size	606mm x 436mm (0.264 m <sup>2</sup> )
	Thickness	28mm
	Weight per piece	7.4kg
	Weight per sqm	28.0kg
	Density	1800- kg/m <sup>3</sup>
	Water Absorption	<10%
	Minimum Gradient	17 degrees

## FRAMECAD Fibre Cement Tiles

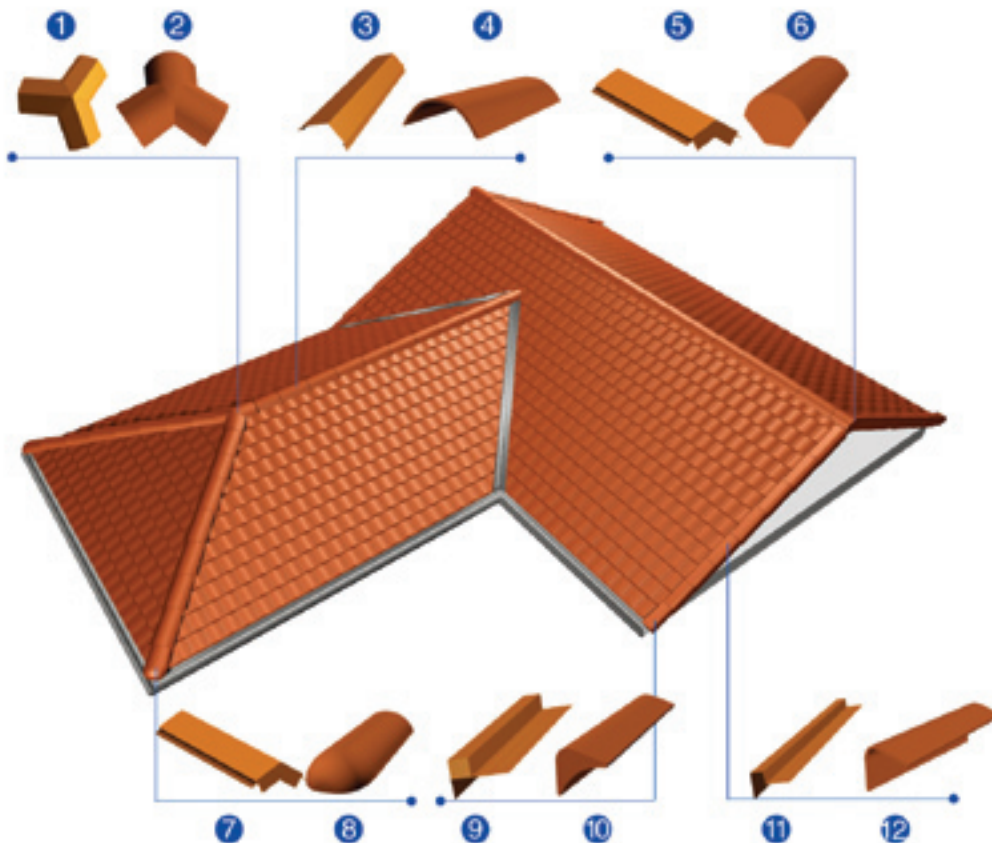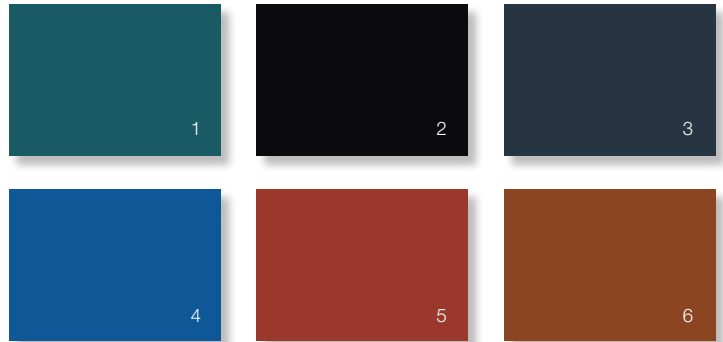

FRAMECAD Cladding and Lining is distributed by:  
FRAMECAD Building Products  
PO Box 1292  
Auckland 1140, New Zealand

**P** +64 9 377 6640  
**F** +64 9 307 7139  
**E** [info@framecad.com](mailto:info@framecad.com)

Innovation Integration Sustainability

[www.framecad.com](http://www.framecad.com)